


D-Light's Compact LIGHT EMITTING DIODES (LED's) to deliver Power Solutions anywhere darkness begins. The revolution in the field of new generation Standalone **Sun Powered System.**



- Eco-Friendly
- World Class SPV module
- Fully Automatic
- Low cost high results
- Compact & easy to install

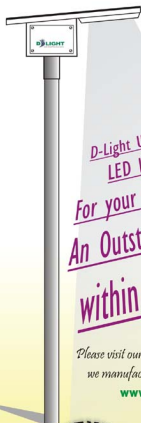

100%
SOLAR SOLUTION

*D-Light Ultra Bright
LED Luminary
For your Outdoor Area.
An Outstanding Quality
within your budget.*

Please visit our website For more solar products we manufacture and integrate the system :

www.d-lightpower.com

Manufacturer & System Integrator :

D-LightPowerControls

Eastern India Office : # 213, Ashoka Place, 2nd Floor, Exhibition Road, Patna 800 001 (Bihar) INDIA

Tel : 91-612-2501025, 3250849. Telefax : 91-612-2501025, M : 09835204421,

E.mail : d_lightpower@yahoo.co.in

Technical Specifications

General		
Model No.	High Light HL-25	
Solar Module (Charging)	25Wp, 16.5V. Multi / Mono Type. 475mm x 535mm x 22mm (LxWxT)	
Battery (Storage)	Type SMF, 12V, 28Ah.	
Luminary (Intensity)	Ultra bright LEDs type, 12V, 600mA, (Equivalent to 9 W white CFL).	
On / Off level	Automatic day / night detection on / off. Single card with batter protection.	
Charging Time	7-8 hours (weather dependant)	
Operation Time	Up to 2 nights	
Body (Casing)	MS sheet with Hot dipped powder coated, weather proof.	
Pole	17ft. MS pipe of 2.25" dia, M, Class, 2mm	

Z-Axis (height)	X-Axis (distance)	Illumination (lux)
17ft.	0 mtr.	2.50
	2 mtr.	1.40
	4 mtr.	0.26
	6 mtr.	0.07
	8 mtr.	0.01

Applications :

- Pathway and Highways - Parking areas - Resident / Industrial areas Parks & Lone. It is powered by photovoltaic panels and is completely independent from utility power. Fully compact and ready to use unit.

Warranty : One Year (against manufacturing defects only.)



80%

Income Tax Depreciations
First Year itself